



Recommended For



Utility Scale Ground Mounted



TPSh-M2P60SF1W

275W

Poly Crystalline Photovoltaic Module

Key Feature



High module efficiency



Plus power tolerance:0~+5W.



Independently developed anti-reflective and self-cleaning glass surface reduces power loss from dirt and dust.




Excellent performance under low light environments, create better kWh/kW ratio and produce 2- 3% more electricity average in average.



Certified by TUV to withstand high level of wind loads (2400Pa) and snow loads (5400Pa)*.

Not Your Average Solar Provider

Our Products Categories

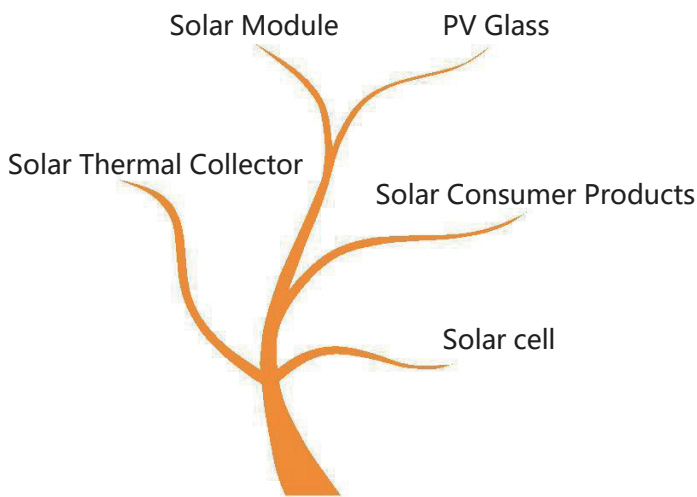

Guaranteed Performance**

10 Years Manufacturing Warranty


12 Years Warranty,90% Power Output

25 Years Warranty,80% Power Output

Free module recycling through membership in the PV Cycle Association

Best Quality

- Junction box and bypass diodes guarantee the modules free of overheating and "hot spot effect" .
- Compatible with industry standard inverters and Mounting systems. Guarantee minimal maintenance effort required.
- 100% EL double-inspection ensures modules free of defects.
- Potential Induced Degradation (PID) free.

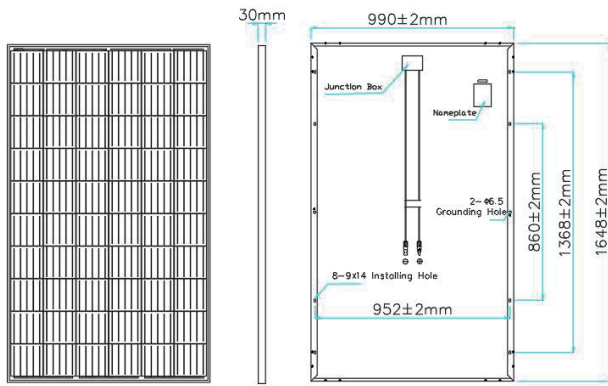

MECHANICAL DRAWINGS

TPSh-M2P60SF1W

275W
Poly Crystalline Photovoltaic Module

ELECTRICAL CHARACTERISTICS

MECHANICAL SPECIFICATION

Cell Type	Poly Crystalline 157×157mm
Number of cells	60 (6×10)
Dimensions (A×B×C)	1648×990×30mm
Weights	17.5kg
Front Glass	3.2 mm Low iron tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP 67, with bypass diodes
Connector	MC4 compatible
Output Cables	TÜV standard, length 900mm, 4.0mm ²

The typical relative change in module efficiency at an irradiance of 200W/m² in relation to 1000W/m² (both at 25°C and AM 1.5 spectrum) is less than 6%.

PACKING CONFIGURATION

Container	20' GP	40' GP	40' HQ
Pieces per container	432	1008	1064

TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	44±3°C
Temperature Coefficient of Pmax (γ)	-0.4%/k
Temperature Coefficient of Voc (β)	-0.37%/k
Temperature Coefficient of Isc (α)	0.05%/k

SYSTEM INTEGRATION PARAMETERS

Maximum system voltage	DC 1500V
Maximum Series Fuse	15A
Maximum reverse current	21.5A
Increased snowload acc. to IEC 61215	5400Pa
Operating Temperature	-40~+85°C
Number of bypass diodes	3

PERFORMANCE AT STANDARD TEST CONDITION (STC:1000W/m²,25°C,AM1.5)

Module Series	TPSh-M2P60SF1W-XXXW
Maximum Power at STC(Pmax)W	275
Short Circuit Current(Isc)A	9.15
Open Circuit Voltage(Voc)V	38.24
Maximum Power Current(Imp)A	8.86
Maximum Power Voltage(Vmpp)V	31.07
Module Efficiency%	16.86
Power Tolerance	0~+5W

QUALIFICATIONS AND CERTIFICATES

CE-Compliant, IEC 61215 (Ed.2), IEC 61730 (Ed.1) application class A, TÜV Safety Class II, UL 1703



DEALER INFORMATION BOX